

Verdcol® BML Orange 64

- Brilliant mid shade orange
- Excellent heat resistance
- Excellent Fastness

| | |
|-----------------------------------|----------------------|
| Colour Index | Pigment Orange 64 |
| C.I. No. | 12760 |
| CAS No. | 72102-84-2 |
| REACH Pre-Registration No. | Available on Request |

Physical Data

| | |
|--------------------------------------|---------|
| Density[g/cm ³] | 1.5~1.6 |
| Specific Surface [m ² /g] | 25~30 |
| Oil Absorption[g/100g] | 60~65 |

Application


| | |
|-------------------------|---|
| PVC | ● |
| PE/PP | ● |
| PS | ● |
| ABS | ● |
| PA | - |
| PC | ○ |
| PUR | ● |
| PET/PBT | ○ |
| Rubber | ● |
| | |
| ● : recommended | |
| ○ : limited suitability | |
| - : not recommended | |

Fastness

| Light | Weather | Migration (In PVC) | Acid | Alkali |
|-------|---------|-----------------------|------|--------|
| 7-8 | 3-4 | 5 | 5 | 5 |



Full Shade

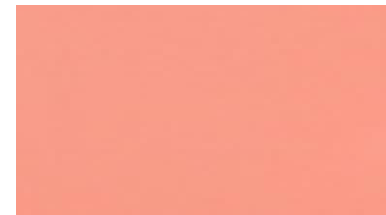

Tint 1:10 TiO₂

Heat Resistance (In HDPE)

